


800x800 Outdoor cabinet


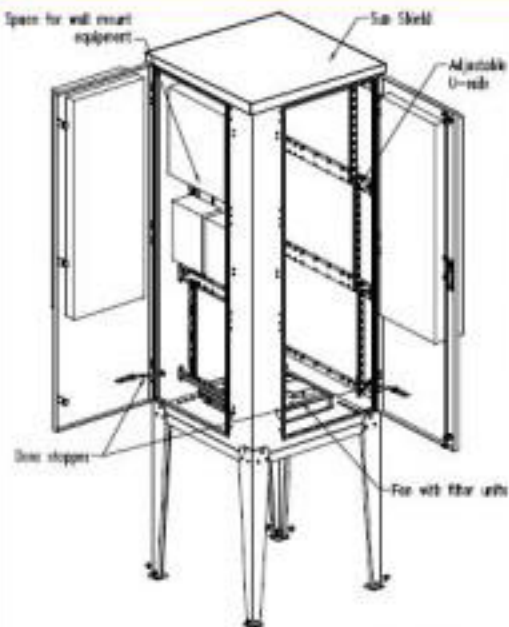


Usage options

- Filters can be removed and cleaned or replaced.
- 1 or 141 slots units can be installed in both doors.
- Access to front and to side of cabinet.
- Cabinet stand is designed for ULCT box mounting.
- Front and side door are equipped with a 3 point locking mechanism and stoppers.
- All doors can be either left or right handed, depending on site conditions.
- Doors can open 90 degrees for wall mount units, and can also be removed for accessibility.
- U-mount rack system, can be set up for access from either door, and have 362 U adjustable depth rails to accommodate client requirement.

Specifications

- 800x800 foot print x 1640 height.
- A total of 350 mounting spaces.
- Consists of 3x 120 rails in front and back, each mounted separately to horizontal rails for easy adjustment.
- Air-conditioning unit can accommodate up to a 1250W unit for maximum cooling.
- 2x12 holes in bottom covers for power run entry, and 20x 600 holes for data / fiber entry.
- Entire cabinet frame are made of 3003 5/8 alloy coated.
- Bottom support frame hot dip galvanized.
- Fan unit with air filter system to create positive pressure to inhibit dust in cabinet.

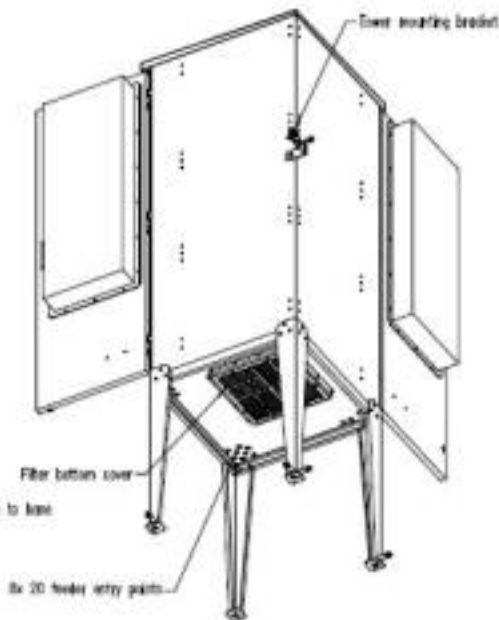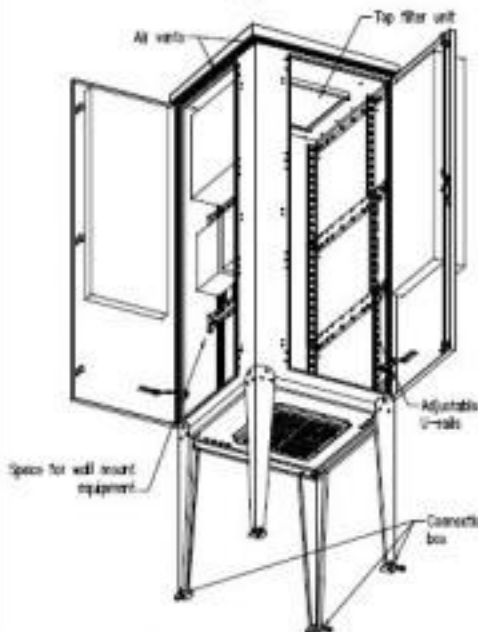

Graffo Innovative wireless infrastructure solutions

Tel: +27 (0)21 905-0010

Fax: +27 (0)21 905-0020

Web: www.graffo.co.za

800x800 outdoor cabinet
with possible air conditioning units
(door mount)
Isometric views